



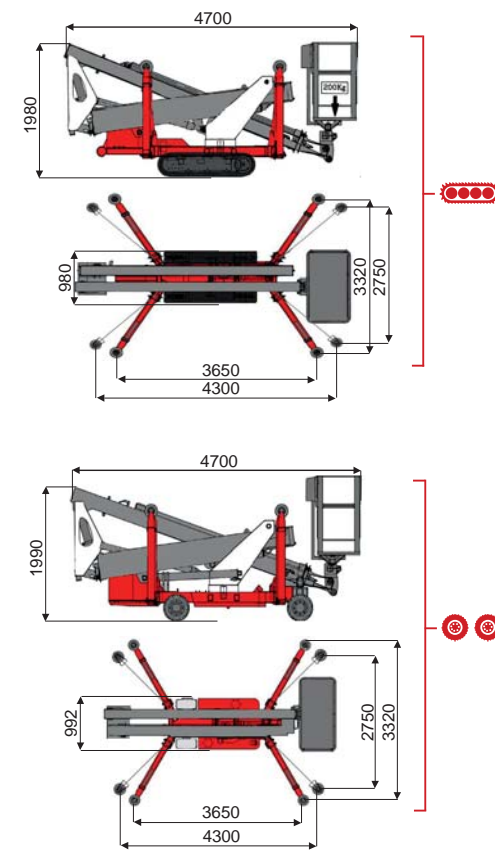

22,5 m ↑  
10 m →  
200 Kg 🧑🧑

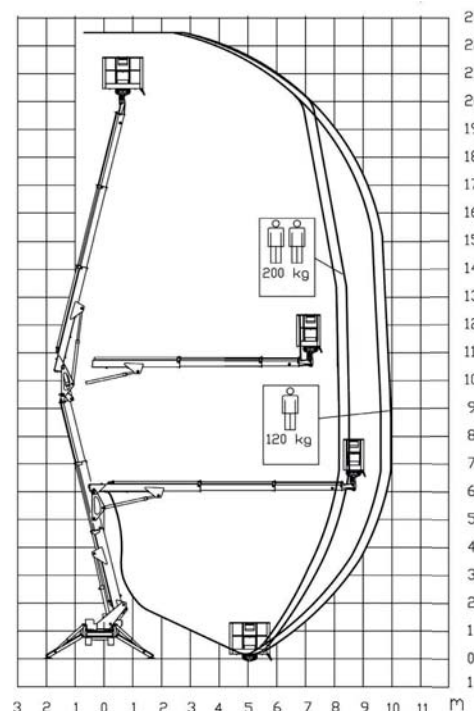

BI-ENERGY Diesel+AC																			
TZX 225/C			22,5 m	10 m	120/200 kg	360°	140x70 cm	90°+90°	2,75-3,32 m	25%	20%	2 km/h	2500 kg	1900 daN	3,9 daN/cm <sup>2</sup>	0,45 daN/cm <sup>2</sup>	980 mm	4700 mm	1980 mm
TZX 225/R			22,5 m	10 m	120/200 kg	360°	140x70 cm	90°+90°	2,75-3,32 m	25%	20%	2 km/h	2500 kg	1900 daN	3,9 daN/cm <sup>2</sup>	5,95 daN/cm <sup>2</sup>	992 mm	4700 mm	1990 mm

ECO	Battery type	Battery charge	Add. Weight	Autonomy	Charging time	Electropump
DC+AC	24V 240 A/h	230V-24V 40A	230 kg	3-4 h endless	6h	24V 5.5 kW